


INSYS® recommends Windows®

miniPC RL5/RL6-T3 – Small only in size



T1

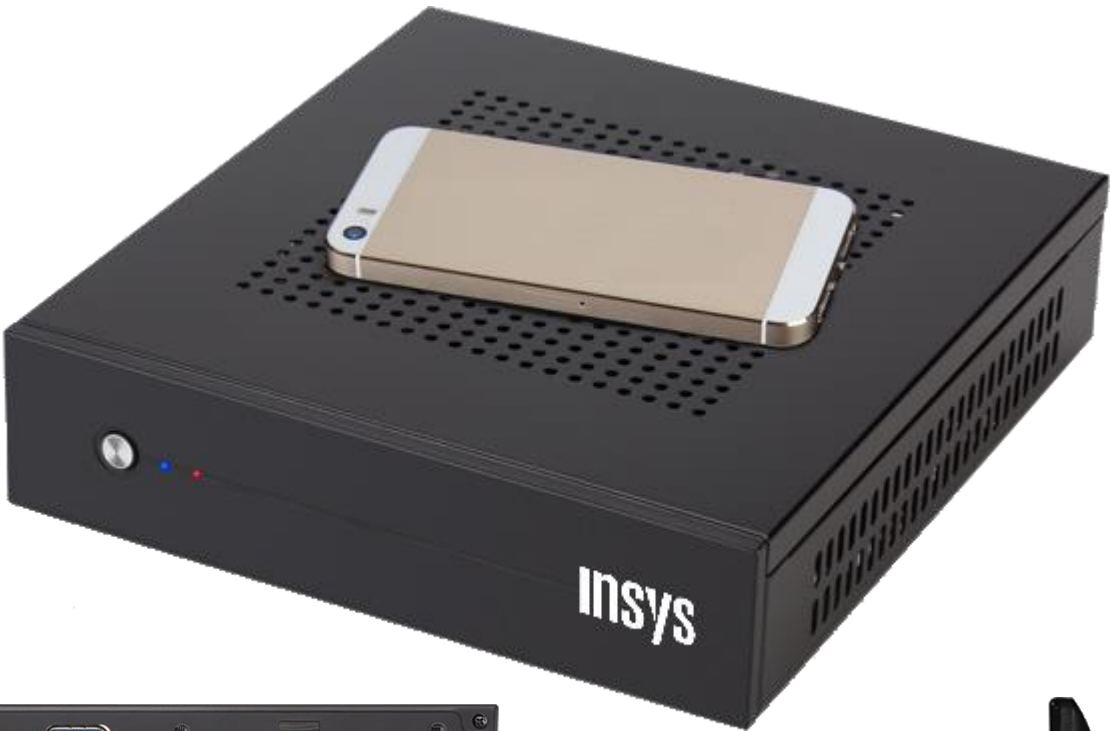

T2



T1-6C



VESA



INSYS miniPC RL5-T3/RL6-T3

Model	RL5-T3	RL6-T3		
	J1900	i3H40	i5B2	i7H45
OS	Linux pre installed; Support for Microsoft® Windows® 10 / 10 64-bit / 8 / 8 64-bit / 7 64-bit / Vista™ / Vista™ 64-bit / XP / XP 64-bit compliant			
Processor	Intel® Celeron® Processor J1900 (2M Cache, up to 2.42 GHz)	Intel® Core™ i3-4010U Processor (3M Cache, 1.30 GHz)	Intel® Core™ i5-5020U Processor (3M Cache, up to 1.90 GHz)	Intel® Core™ i7-4500U Processor (4M Cache, up to 3.00 GHz)
Storage	1x 2.5” HDD SATAII Interface; 1x Mini PCIe mSATA			
Memory	1x DDR3L SO-DIMM slot, support up to 8 GB Support 1.35V DDR3L 1066/1333 MHz non-ECC Ram	2x DDR3L SO-DIMM slot, up to 16GB ; support 1.35V DDR3L 1066/1333 MHz ; suport non-ECC RAM		
Graphics	Intel® HD Graphics;			
	1x HDMI Max resolution 1920x1080	1x HDMI Max resolution 2560x1600		1x HDMI Max resolution 3400x2000
	1x D-Sub, Max Resolution 1920x1080			
Audio	Realtek ALC662 HD Audio Controller Supports High Definition Audio; 2/4/5.1 surround sound (via HDMI)			
LAN	Model T1: Gigabit LAN Realtek RTL8111E Model T2: Dual gigabit LAN Realtek RTL8111E			
Rear Panel I/O	1x VGA/D-Sub Port 1x HDMI Port 2x USB 3.0 Ports Model T1: 2x USB2.0 2x Serial Port (6C: 4x extra ports optional) Model T1: 1x RJ-45 LAN Port / Model T2: 2x RJ-45 LAN ports Audio Jacks: Line in / Line out 1x DC in			
Front Panel I/O	1x Ready-to-Use USB 2.0 Port			
Power	AC Adapter Input 100-240V / 50/60Hz 1,6 A Output 12V / 5A			
Dimensions (WxHxD)	185x44x197.5mm			