

INSYS® recommends Windows®
INSYS® recomenda Windows®

insys

w w w . i n s y s . p t

Mobility Computers




Small only in Size
Pequeno apenas no tamanho

miniPC ES5-B1



- Just 0,9L volume / Mini PC com apenas 0,9L
- USB2.0 VGA, HDMI, RJ45
- HDD / SSD 2,5" 7mm + SSD mSATA



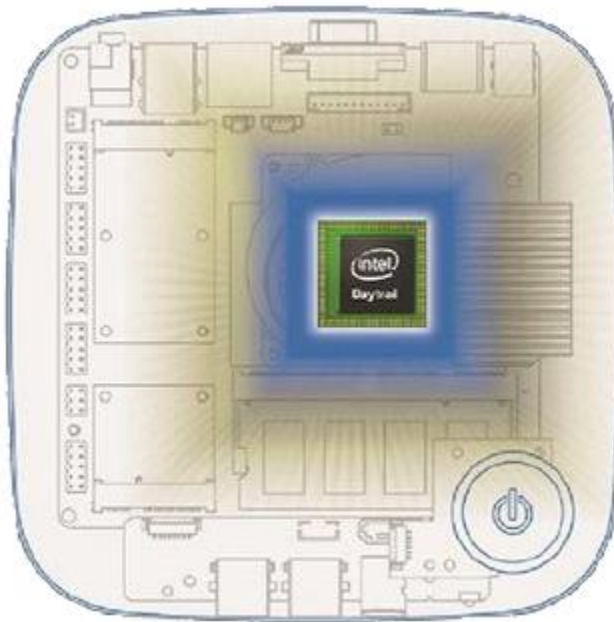

Insys

miniPC ES5-B1
Mobility Computers



CPU

- Intel® Celeron® J1900 (2M Cache, até 2.42 GHz)

Memory

- 1x slot SO_DIMM DDR3L
- Max. 4GB

Video controller

- Intel® HD Graphics (GPU depends of CPU)
- Intel Dynamic Video Memory Technology up to 1.7GB
- Microsoft DirectX® 11 compatible

Storage

- 1x SSD mSATA
- 1x HDD/SSD 2,5" 7mm SATA interface

Audio

- High definition Audio Interface
- Built-in Microphone

Card reader

- MicroSD support

I/O Ports

- 4x USB 2.0
- 1x VGA output
- 1x HDMI™ type A output
- 1x DC-In jack
- 1x Headphone jack
- 1x RJ-45
- 1x IR receptor (factory option)

Communications

- **miniPCIe Wireless LAN 802.11B/G/N**
- Built-in 10/100/1000Mb Based-TX Ethernet LAN
- (factory option) Intel® Wireless-N 7260, 2x2 BGN +BT HMC (Wilkins Peak)

Power

- Full range AC adapter 40W, AC in 100~240V, 50~60Hz, Output DC 19V 2,1A

Operating System

- Windows 7 / Windows 8.1 / Windows 10 / Linux

Dimensions

- 153,4(L) x 153,4(C) x 39(A) mm

Processador

- Intel® Celeron® J1900 (2M Cache, até 2.42 GHz)

Memória

- 1x slot SO_DIMM DDR3L
- Max. 4GB

Gráficos

- Intel® HD Graphics (GPU depende do processador)
- Intel Dynamic Video Memory Technology up to 1.7GB
- Microsoft DirectX® 11 compatible

Armazenamento

- 1x SSD mSATA
- 1x HDD/SSD 2,5" 7mm interface SATA

Sistema áudio

- Interface Audio de alta definição
- Microfone integrado

Leitor de cartões

- Leitor de cartões MicroSD

Portas E/S

- 4x USB 2.0
- 1x saída VGA
- 1x saída HDMI™ Tipo A
- 1x jack DC-In
- 1x jack auscultadores
- 1x RJ-45
- 1x Receptor IR (opção de fábrica)

Comunicações

- **Módulo miniPCIe Wireless LAN 802.11B/G/N**
- 10/100/1000Mb Based-TX Ethernet LAN integrada
- (Opção de fábrica) Intel® Wireless-N 7260, 2x2 BGN +BT HMC (Wilkins Peak)

Alimentação

- Full range AC adapter 40W, AC in 100~240V, 50~60Hz, Output DC 19V 2,1A

Sistema operativo

- Windows 7 / Windows 8.1 / Windows 10 / Linux

Dimensões

- 153,4(L) x 153,4(C) x 39(A) mm